


Terminal Dimensions

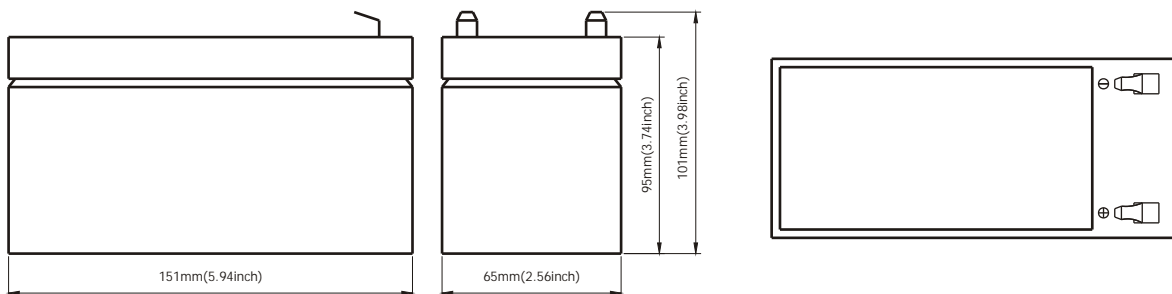

**CJ Series**

STAND POWER CJ(General Models)Series Valve Regulated Lead Acid batteries are designed with AGM(Absorbent Glass Mat) technology, high performance plates and electrolyte to gain extra power output for common power backup system applications widely used in the field of UPS, Emergency Lighting System.

**Application**

- Alarm System
- Cable Television
- Communication Equipment
- Control Equipment
- Security System
- Medical Equipment
- UPS
- Power tools
- Emergency Power System
- Toys


**General Features**

- Sealed and maintenance free operation.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- High quality and high reliability.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

**Construction**

- Component .....Raw material
- Positive .....Lead dioxide
- Negative .....Lead
- Container .....ABS
- Cover .....ABS
- Sealant .....Epoxy Resin
- Safety valve .....EPDR
- Terminal .....Copper
- Separator .....Fiber glass
- Electrolyte .....Sulfuric acid

|                                  |   |                   |                      |                 |
|----------------------------------|---|-------------------|----------------------|-----------------|
| Battery Model                    | CJ 12-7.2                                   |                   |                      |                 |
| Designed Floating Life           | 5 Years                                     |                   |                      |                 |
| Capacity(25°C)                   | 20HR(0.36A,1.75V)                           | 10HR(0.65A,1.75V) | 5HR(1.12A,1.75V)     | 1HR(4.6A,1.75V) |
|                                  | 7.2AH                                       | 6.5AH             | 5.6AH                | 4.6AH           |
| Dimensions                       | Length                                      | Width             | Height               | Total Height    |
|                                  | 151mm(5.94inch)                             | 65mm(2.56inch)    | 95mm(3.74inch)       | 101mm(3.98inch) |
| Approx. Weight                   | 2.55Kg (5.63 lbs)                           |                   |                      |                 |
| Internal Resistance              | Full charged at 25°C :0.02 Ohm              |                   |                      |                 |
| Self Discharge                   | 3% of capacity declined per month at (25°C) |                   |                      |                 |
| Capacity Affected by Temp.(20HR) | 40°C  | 25°C              | 0°C                  | -15°C           |
|                                  | 102%  | 100%              | 85%                  | 65%             |
| Charge Voltage(25°C)             | Cycle use                                   |                   | Float use            |                 |
|                                  | 14.4-14.8V(-30mV/ °C), max. Current: 2.16A  |                   | 13.6-13.8(-20mV/ °C) |                 |

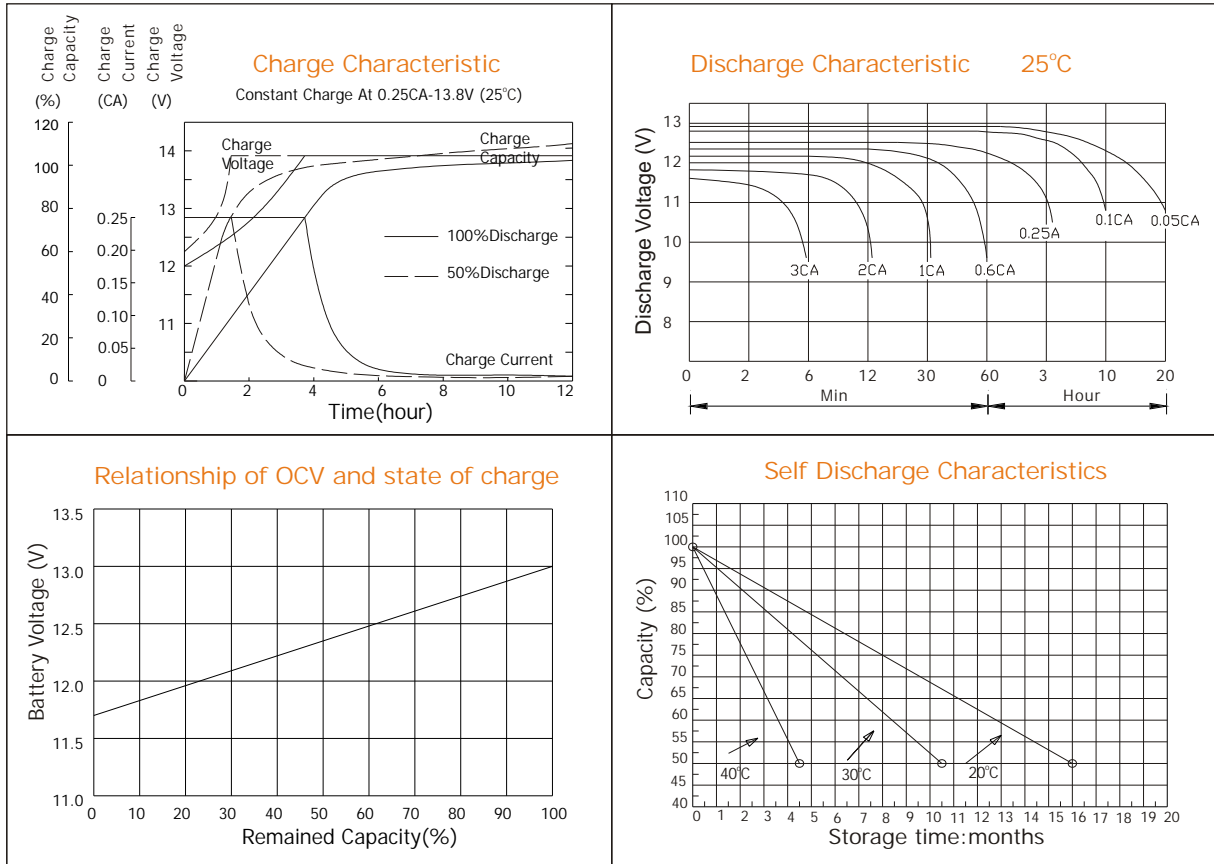

Constant current discharge ratings-amperes at 25°C

| F. V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR  | 3HR  | 5HR  | 10HR | 20HR |
|-----------|------|-------|-------|-------|------|------|------|------|------|
| 1.60V     | 28.1 | 17.5  | 13.2  | 8.05  | 5.12 | 2.25 | 1.37 | 0.77 | 0.40 |
| 1.67V     | 26.4 | 16.6  | 12.7  | 7.70  | 5.05 | 2.16 | 1.34 | 0.76 | 0.39 |
| 1.70V     | 24.2 | 16.0  | 12.4  | 7.00  | 4.90 | 2.02 | 1.32 | 0.76 | 0.38 |
| 1.75V     | 23.7 | 15.5  | 12.0  | 6.65  | 4.67 | 1.95 | 1.29 | 0.75 | 0.37 |
| 1.80V     | 21.2 | 14.8  | 10.9  | 6.16  | 4.37 | 1.87 | 1.21 | 0.74 | 0.36 |
| 1.85V     | 18.7 | 14.1  | 9.80  | 5.67  | 4.07 | 1.80 | 1.13 | 0.73 | 0.35 |

Constant power discharge ratings-watts at 25°C

| F. V/Time | 5MIN | 10MIN | 15MIN | 30MIN | 1HR  | 3HR  | 5HR  | 10HR | 20HR |
|-----------|------|-------|-------|-------|------|------|------|------|------|
| 1.60V     | 49.3 | 31.6  | 24.1  | 14.5  | 9.24 | 3.98 | 2.32 | 1.54 | 0.81 |
| 1.67V     | 47.6 | 30.8  | 23.8  | 14.2  | 9.18 | 3.86 | 2.31 | 1.53 | 0.78 |
| 1.70V     | 44.8 | 30.5  | 23.6  | 13.3  | 9.00 | 3.69 | 2.28 | 1.52 | 0.77 |
| 1.75V     | 45.1 | 30.4  | 23.4  | 12.9  | 8.85 | 3.60 | 2.26 | 1.50 | 0.75 |
| 1.80V     | 41.3 | 30.0  | 21.7  | 12.3  | 8.34 | 3.49 | 2.19 | 1.48 | 0.73 |
| 1.85V     | 37.4 | 28.4  | 19.7  | 11.5  | 7.84 | 3.39 | 2.12 | 1.46 | 0.70 |



STAND POWER INDUSTRIAL CO., LTD.  
Room 26A-B, ShangBu Building, No.68, NanYuan Road, ShenZhen 518031 P.R.China.  
Tel: (+86-755)83661105, 83661090, 83661091, 83661092 Fax: (+86-755)83661101  
Website: www.standbattery.com E-mail: Sales@standbattery.com