

# Rechargeable lithium-ion battery

## MP 174865

High performance  
Medium Prismatic cell



### Benefits

- Extended autonomy and life for mobile systems
- Wide operating temperature range
- Recommended for ruggedized designs
- Easy integration into compact and light systems

### Key features

- Very high energy density (380 Wh/l, 163 Wh/kg)
- Unrivalled low temperature performance
- Excellent charge recovery after long storage, even at high temperature
- Maintenance free
- Long cycle life (over 70% initial capacity after 500 cycles 100% DoD)

### Main applications

- Mobile asset tracking
- Rack-mount telecom batteries
- Small UPS
- Soldier of the future equipment
- Portable radios
- Professional portable lighting
- Electric bikes and personal mobility
- Portable gaz analysers
- Professional video

### Electrical characteristics

Nominal voltage (1.1 A rate at 20°C)	3.75 V
Typical capacity 20°C (at 1.1 A 20°C 2.5 V cut off)	5.3 Ah (when charged up to 4.2 V) 4.8 Ah (when charged up to 4.1 V)

### Mechanical characteristics (Unsleeved 100% charged cell)

Thickness max	19.0 mm
Width max	48 mm
Height max	65 mm
Typical weight	124 g
Lithium equivalent content	1.6 g
Volume	52 cm <sup>3</sup>
Nominal energy	20 Wh

### Operating conditions

Charge method	Constant Current/Constant Voltage
Charge voltage	4.20 +/- 0.05 V
Maximum recommended charge current**	5.0 A (~C rate)
Charge temperature range*	-20°C to +60°C
Time at 20°C	To be set as a function of the charge current: C rate → 2 to 3 h C/2 rate → 3 to 4 h C/5 rate → 6 to 7 h

Maximum continuous discharge current*	11 A (~2C rate)
Pulse discharge current	up to 21 A (~4C rate)
Discharge cut off voltage	2.5 V
Discharge temperature range	-50°C to +60°C


\* Consult Saft for optimized charging below 0°C

\*\* Electronic protection circuits within battery packs may limit the maximum charge/discharge current allowable. Consult Saft.  
ATEX-compliant cell version available on request

# MP 174865

## Technology

- Graphite-based anode
- Lithium Cobalt oxide-based cathode
- Electrolyte: organic solvents
- Built-in redundant safety protections
- Batteries assembled from MP cells feature an electronic protection circuit

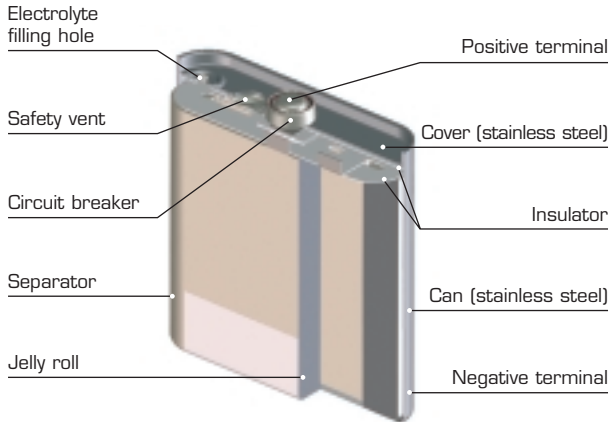

## Built-in protection devices ensure safety in case of:

- Exposure to heat
- Exposure to direct sunlight for extended periods of time
- Short circuit
- Overcharge
- Overdischarge

## When handling Saft MP batteries:

- Do not solder directly to cell terminal
- Do not disassemble
- Do not remove the protection circuit
- Do not incinerate

## Transportation and storage:

- Store in a dry place at a temperature preferably not exceeding 30°C
- For long-term storage, keep the battery within a (30 ± 15) % state of charge

## Saft


### Specialty Battery Group

12, rue Sadi Carnot  
93170 Bagnolet - France  
Tel +33 (0)1 49 93 19 18  
Fax +33 (0)1 49 93 19 69


313, Crescent Street  
Valdese NC 28690 - USA  
Tel +1 (828) 874 41 11  
Fax +1 (828) 879 39 81

[www.saftbatteries.com](http://www.saftbatteries.com)


## Capacity versus current at 20°C

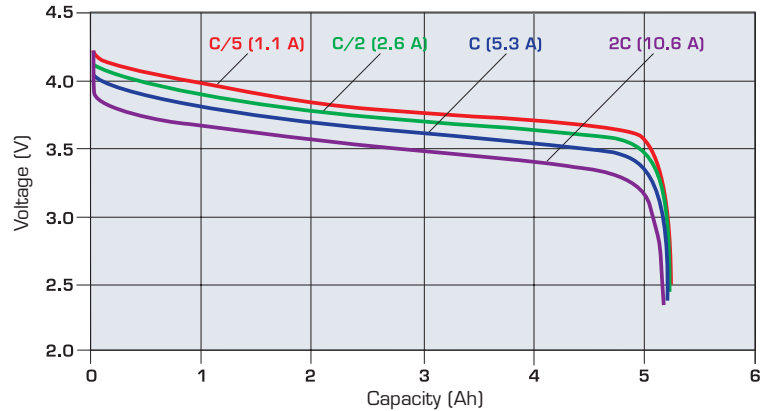

## Typical discharge profiles (1.1 A - C/5 rate)

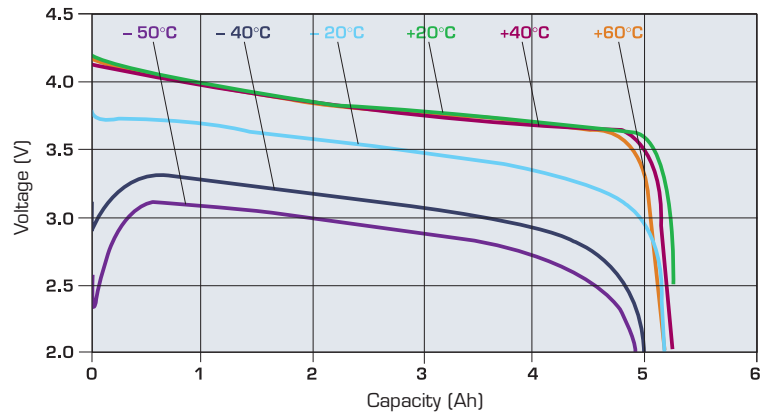

## Charge characteristics to 4.2 V at +20°C at C, C/2, and C/5 rates

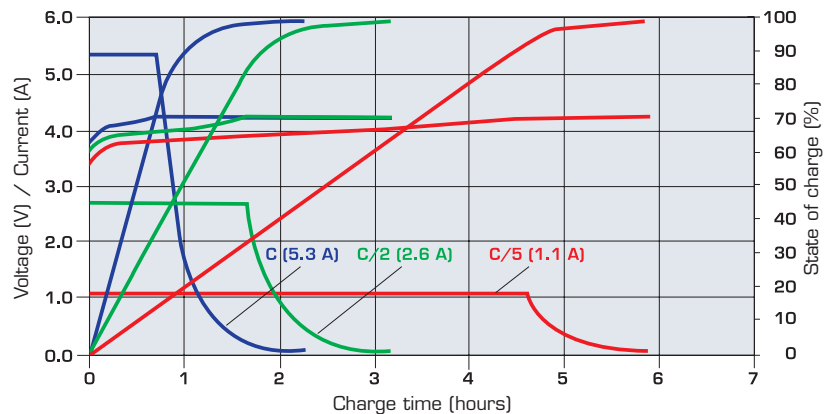

Doc. N° 54043-2-1105

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.

Published by the Communications Department.

Photo credit: Saft.

Société anonyme au capital de 31 944 000€  
RCS Bobigny B 383 703 873

Produced by Arthur Associates.

