

# HIGH ENERGY SERIES

Nickel-Cadmium

## VE 2/3 A

With the VE series, Saft upgrades its standard technology : it boosts capacity by 10 to 15% without increasing volume, while at the same time maintaining performance levels.

The VE 2/3 A cell offers significant capacity Gains for the same volume, high energy for applications requiring a higher operating time and good storage retention.

To meet customers requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.



### Applications

- Professional electronics
- Cordless communication systems
- Home appliances
- Private mobile radio

### Main advantages

- High energy series giving a higher operating time
- Good storage retention
- Quick and fast charge
- Cycling application

### Technology

- Sintered positive electrode
- Plastic bonded negative electrode

### Temperature range in discharge

-20°C to +60°C

### Storage

Recommended: +5°C to +25°C

Relative humidity: 65 ± 5%

Data are given for single cell.

Please consult Saft for utilization of cell outside this specification.

### Electrical characteristics

|                                   |           |
|-----------------------------------|-----------|
| Nominal voltage (V)               | 1.2       |
| IEC typical capacity (mAh) at C/5 | 670       |
| IEC minimum capacity (mAh) at C/5 | 600       |
| IEC designation                   | KRH 17/29 |
| Impedance at 1000 Hz (mΩ)         | 25        |

### Dimensions

|                             |              |
|-----------------------------|--------------|
| Diameter (mm)               | 16.7 +/- 0.2 |
| Height (mm)                 | 28.0 +/- 0.2 |
| Top projection (mm)         | 0.7 +/- 0.2  |
| Top flat area diameter (mm) | 5.6          |
| Weight (g)                  | 18           |

Dimensions are given for bare cells

### Charge conditions

| Rate     | Time (h) | Temp. (°C) | Charge current (mA) |
|----------|----------|------------|---------------------|
| Fast     | ~1       | +10 to +40 | 600                 |
| Quick    | 3 to 4   | +5 to +50  | 200                 |
| Standard | 16       | 0 to +50   | 60                  |
| Trickle* |          | -20 to +50 | 25                  |

End of charge cut-off is requested: -dV or dT°C/dt

\* Trickle charge follows quick or fast charge

The maximum battery temperature recommended during charge is +45°C

### Maximum discharge current


|                         |     |
|-------------------------|-----|
| Continuous (A) at +20°C | 3.0 |
|-------------------------|-----|




# HIGH ENERGY SERIES

Nickel-Cadmium  
VE 2/3 A

## Voltage in normal charge (current 0.1 C)

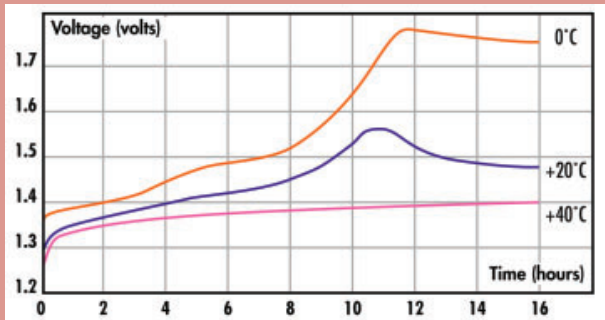


## Voltage in fast charge (current 1.2 C at temperature +20°C)

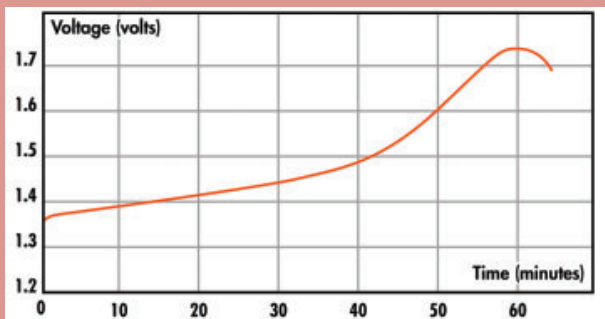


## Voltage in discharge at +20°C

(after charge 0.1 C x 16 hours at +20°C)

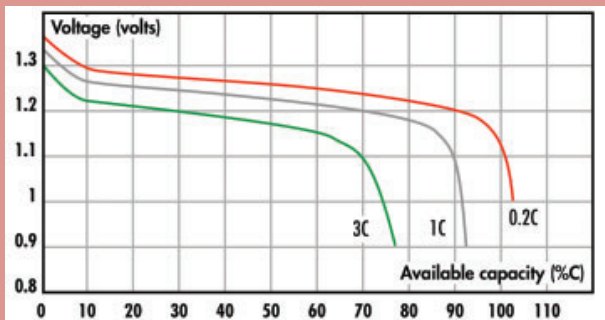


## Charge retention (between +20°C and +60°C)

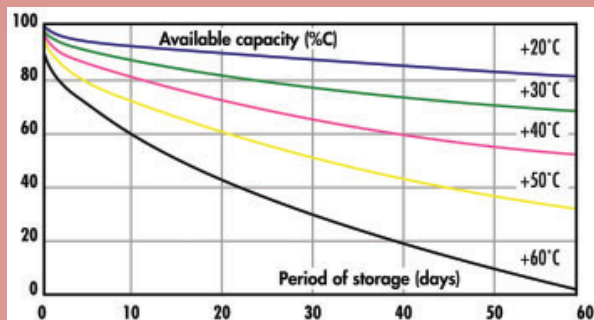

## Typical performances

For graphs shown, C is the IEC<sub>5</sub> capacity.  
Dimensions are in mm.



## SAFT

### Rechargeable Battery systems

12, rue Sadi Carnot  
93170 Bagnole - France  
Phone: +33 (0)1 49 93 19 18  
Fax: +33 (0)1 49 93 19 68  
Email: rbs.info@saft.alcatel.fr  
DOC. N° 11070-2-0602  
Published by the Communication Department

[www.saftbatteries.com](http://www.saftbatteries.com)

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

